


NOTE : STRUCTURE IS DESIGNED FOR
"4 STRUCTURAL SLABS+ROOM",
ADDITIONAL SLAB NOT ACCEPTABLE.

NOTE : MIN 7 DAYS, CURING SHOULD
BE DONE FOR FOOTINGS & PEDESTALS.

NOTE : EXCAVATION & CONSTRUCTION WORK
IS PURELY CONTRACTOR/CLIENT RESPONSIBILITY,
ARCHITECT & STRUCTURAL ENGINEERS
ARE RESPONSIBLE FOR DESIGN WORKS ONLY.

NOTE : CONSTRUCTION SEQUENCE SHOULD FOLLOW FOR EXCAVATION AS GIVEN.

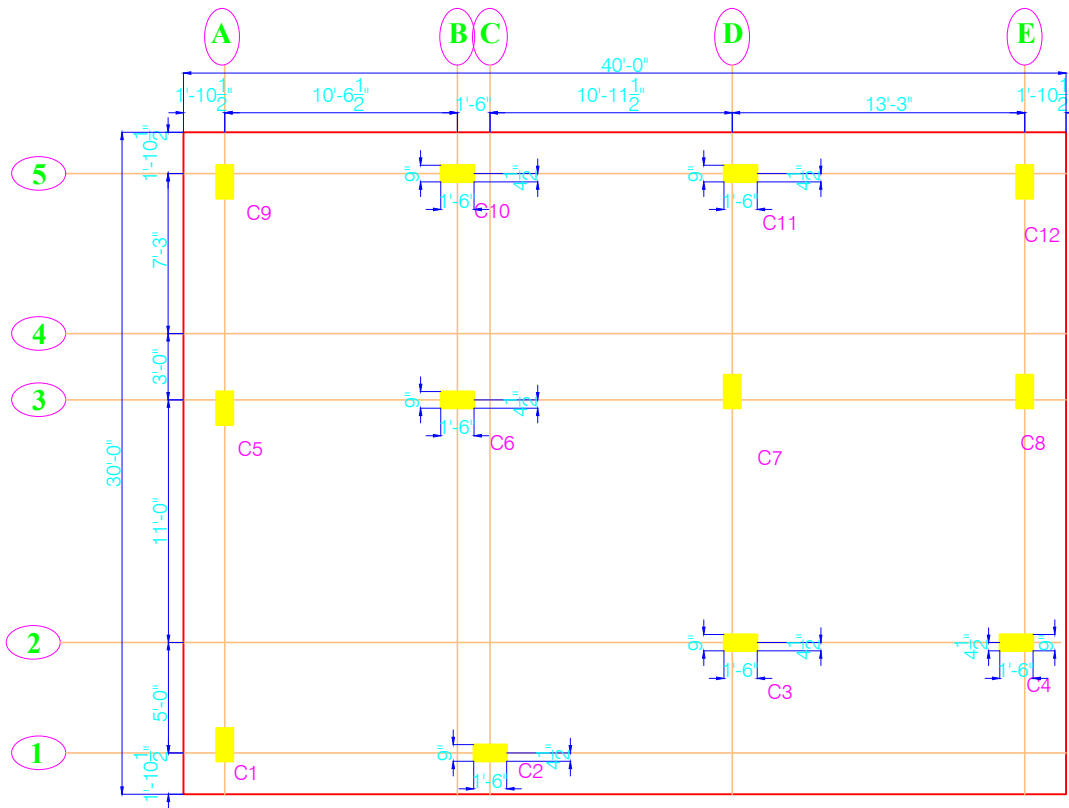

COLUMN MARKING LAYOUT.



NOTE : EXCAVATION DEPTH 6' 6" FROM NGL

STRUCTURAL NOTES:
01. ALL DIMENSIONS ARE IN INCHES & LEVELS ARE IN FEET.
02. DO NOT SCALE THE DRG. FOLLOW WRITTEN DIMENSIONS ONLY.
03. READ THIS DRG. ALONG WITH RELEVANT ARCH./LANDSCAPE / SERVICE DRGS
04. ALL LEVELS / PROFILES / DIMENSIONS / LOCATIONS ARE TO BE CHECKED WITH ARCHITECTURAL / SERVICE DRG.
05. GRADE OF CONCRETE - M20 (1 : 1.5 : 3)
06. GRADE OF STEEL - Fe-500 & DENOTED AS "T".
07. COVER TO REIN. IN FOOTING = 2".
PEDESTAL COLUMN = 1.5"
08. SBC OF SOIL IS CONSIDERED 200 kN/m² AT 6'6" DEPTH FROM NGL LVL.
09. ANY LOOSE POCKETS/WATER TABLE IN FOOTING PITS SHOULD BE BROUGHT TO THE NOTICE OF THE STRUCTURAL CONSULTANT PRIOR TO EXECUTION.
10. ADD 4" ON EITHER SIDE OF THE FOOTING FOR EXCAVATION.
11. ANY DISCREPANCY IN THE DRG. / SITE SHOULD BE BROUGHT TO THE NOTICE OF THE CONSULTANTS PRIOR TO EXECUTION.
12. STRUCTURE IS DESIGNED FOR:
GF + 3 FLOORS + PART SLAB = TOTAL 4 SLABS + RM.
13. STRUCTURE IS DESIGNED FOR DL+LL COMBINATION BY CONSIDERING 1.50 AS TOTAL LOAD FACTOR.
14. BEFORE CASTING FOUNDATION, CLIENT / CONTRACTOR RESPONSIBILITY TO GET IT CHECKED ON SITE. FOUNDATION DETAILS BY STRUCTURAL CONSULTANT. IF NOT, WE ARE NOT RESPONSIBLE FOR ON SITE PROVIDED DETAILS.

ORIENTATION			
N			
PROPOSED RESIDENTIAL BUILDING			
PROJECT	KARNATAKA, BHARATH -		
CLIENT	Mr. _		
DRG. TITLE			
COLUMN MARKING LAYOUT.			
SCALE	DATE	DEALT	DRG. No.
NTS	01/12/2024		
ARCHITECTS :-			

NOTE : STRUCTURE IS DESIGNED FOR
"4 STRUCTURAL SLABS+ROOM ONLY",
ADDITIONAL SLAB NOT ACCEPTABLE.

NOTE : MIN 7 DAYS, CURING SHOULD BE
DONE FOR FOOTINGS & PEDESTALS.

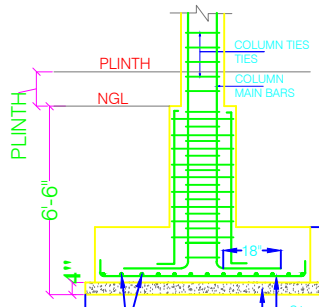

ISOLATED SCHEDULE (M20 GRADE & STEEL FE500)

S.NO	FOOTING TYPE	FOOTING SIZE			FOOTING REINF (BOTTOM LAYER).		REMARKS	TOTAL NO.S
		L	B	D	LONG BAR	SHORT BAR		
1	F1	4'1.5"	5'-0"	20"	T10@5"c/c	T10@5"c/c	FLAT	2
2	F2	4'-6"	6'-0"	20"	T10@5"c/c	T10@5"c/c	FLAT	2
3	F3	7'-0"	6'-0"	24"	T10@4"c/c	T10@4"c/c	FLAT	1
4	F4	6'-0"	7'-0"	24"	T10@4"c/c	T10@4"c/c	FLAT	1
5	F5	6'-0"	4'-6"	24"	T10@4"c/c	T10@4"c/c	FLAT	2
6	F6	6'-0"	6'-6"	24"	T10@5"c/c	T10@5"c/c	FLAT	1
7	F7	5'-0"	6'-0"	20"	T10@5"c/c	T10@5"c/c	FLAT	1

STRUCTURAL NOTES:
01. ALL DIMENSIONS ARE IN INCHES & LEVELS ARE IN FEET.
02. DO NOT SCALE THE DRG. FOLLOW WRITTEN DIMENSIONS ONLY.
03. READ THIS DRG. ALONG WITH RELEVANT ARCH./LANDSCAPE / SERVICE DRGS
04. ALL LEVELS / PROFILES / DIMENSIONS / LOCATIONS ARE TO BE CHECKED WITH ARCHITECTURAL / SERVICE DRG.
05. GRADE OF CONCRETE - M20 (1 : 1.5 : 3)
06. GRADE OF STEEL - Fe-500 & DENOTED AS "T".
07. COVER TO REIN. IN FOOTING = 2".
PEDESTAL COLUMN = 1.5"
08. SBC OF SOIL IS CONSIDERED 200 kN/m² AT 6'6" DEPTH FROM NGL LVL.
09. ANY LOOSE POCKETS/WATER TABLE IN FOOTING PITS SHOULD BE BROUGHT TO THE NOTICE OF THE STRUCTURAL CONSULTANT PRIOR TO EXECUTION.
10. ADD 4" ON EITHER SIDE OF THE FOOTING FOR EXCAVATION.
11. ANY DISCREPANCY IN THE DRG. / SITE SHOULD BE BROUGHT TO THE NOTICE OF THE CONSULTANTS PRIOR TO EXECUTION.
12. STRUCTURE IS DESIGNED FOR:
GF + 3 FLOORS + TOTAL 3 SLABS.
13. STRUCTURE IS DESIGNED FOR DL+LL COMBINATION BY CONSIDERING 1.50 AS TOTAL LOAD FACTOR.
14. BEFORE CASTING FOUNDATION, CLIENT / CONTRACTOR RESPONSIBILITY TO GET IT CHECKED ON SITE. FOUNDATION DETAILS BY STRUCTURAL CONSULTANT. IF NOT, WE ARE NOT RESPONSIBLE FOR ON SITE PROVIDED DETAILS.

STRUCTURAL CONSULTANTS

DRAWN	ADARSH	DESIGNED	ARON
DATE	01-12-2024	JOB NO.	1031


PROJECT			
PROPOSED RESIDENTIAL BUILDING			
KARNATAKA, BHARATH -			
CLIENT	Mr. _		
DRG. TITLE			
ISOLATED FOOTING SCHEDULE.			
SCALE	DATE	DEALT	DRG. No.
NTS	01/12/2024		
ARCHITECTS :-			

NOTE : STRUCTURE IS DESIGNED FOR
"4 STRUCTURAL SLABS+ROOM",
ADDITIONAL SLAB NOT ACCEPTABLE.

NOTE : MIN 7 DAYS, CURING SHOULD
BE DONE FOR FOOTINGS & PEDESTALS.

NOTE : EXCAVATION & CONSTRUCTION WORK
IS PURELY CONTRACTOR/CLIENT RESPONSIBILITY,
ARCHITECT & STRUCTURAL ENGINEERS
ARE RESPONSIBLE FOR DESIGN WORKS ONLY.

NOTE : CONSTRUCTION SEQUENCE SHOULD FOLLOW FOR EXCAVATION AS GIVEN.

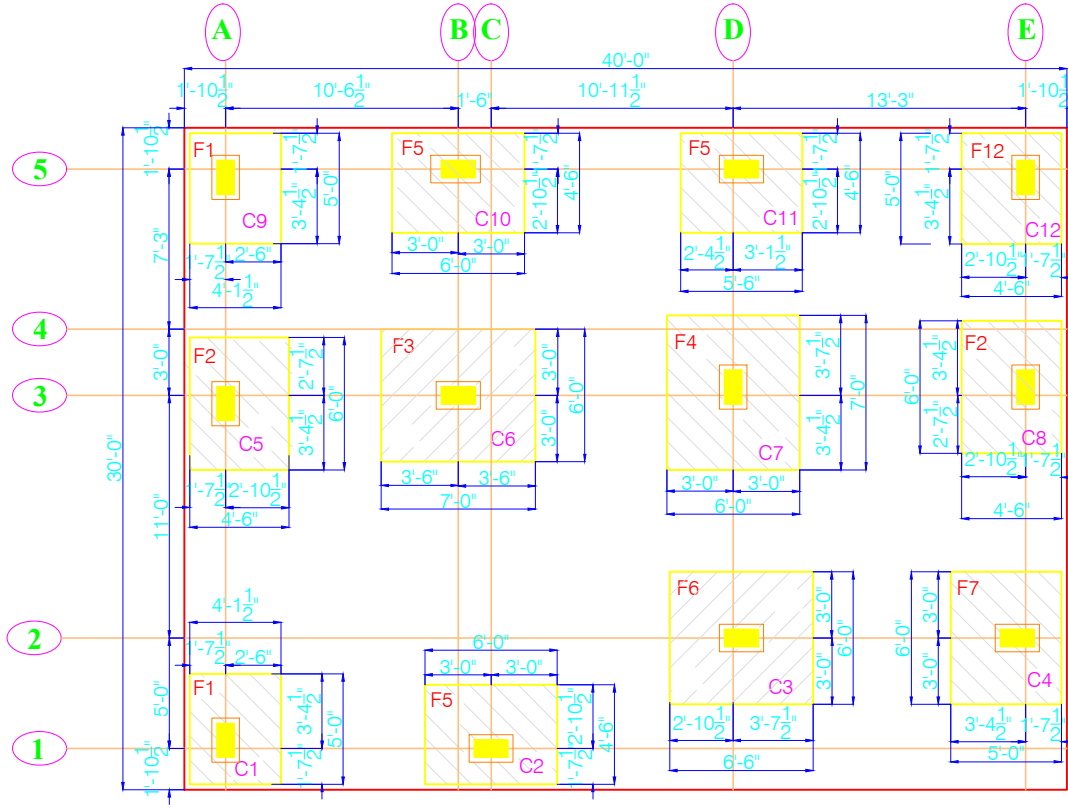

FOOTING MARKING LAYOUT.

NOTE : EXCAVATION DEPTH 6' 6" FROM NGL

NOTE : STRUCTURE IS DESIGNED FOR
"4 STRUCTURAL SLABS+ROOM ONLY",
ADDITIONAL SLAB NOT ACCEPTABLE.

NOTE : MIN 7 DAYS, CURING SHOULD BE
DONE FOR FOOTINGS & PEDESTALS.

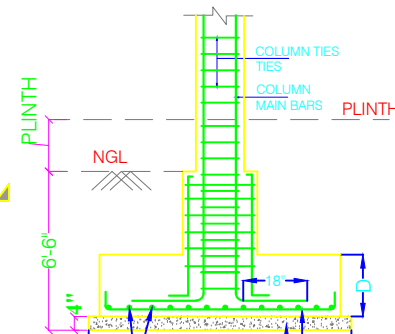



TABLE OF REINFORCEMENT FOR COLUMN PEDESTAL (GRADE OF CONCRETE :M25 & GRADE OF STEEL Fe500)
FROM FOUNDATION LEVEL TO STILT LEVEL

SL NO.	TYPE	SIZE	LONGITUDINAL BARS		LATERAL TIES		OFFSET FROM COLUMN
			SHAPE	REIN	SHAPE	REIN	
1	P1	15" x 24"		10- T10 10mm Dia		T8@8"c/c	3" OFFSET

STRUCTURAL NOTES:
01. ALL DIMENSIONS ARE IN INCHES & LEVELS ARE IN FEET.
02. DO NOT SCALE THE DRG. FOLLOW WRITTEN DIMENSIONS ONLY.
03. READ THIS DRG. ALONG WITH RELEVANT ARCH./LANDSCAPE / SERVICE DRGS
04. ALL LEVELS / PROFILES / DIMENSIONS / LOCATIONS ARE TO BE CHECKED WITH ARCHITECTURAL / SERVICE DRG.
05. GRADE OF CONCRETE - M20 (1 : 1.5 : 3)
06. GRADE OF STEEL - Fe-500 & DENOTED AS "T".
07. COVER TO REIN. IN FOOTING = 2".
PEDESTAL COLUMN = 1.5"
08. SBC OF SOIL IS CONSIDERED 200 kN/m² AT 6'6" DEPTH FROM NGL LVL.
09. ANY LOOSE POCKETS/WATER TABLE IN FOOTING PITS SHOULD BE BROUGHT TO THE NOTICE OF THE STRUCTURAL CONSULTANT PRIOR TO EXECUTION.
10. ADD 4" ON EITHER SIDE OF THE FOOTING FOR EXCAVATION.
11. ANY DISCREPANCY IN THE DRG. / SITE SHOULD BE BROUGHT TO THE NOTICE OF THE CONSULTANTS PRIOR TO EXECUTION.
12. STRUCTURE IS DESIGNED FOR:
GF + 3 FLOORS + PART SLAB = TOTAL 4 SLABS + RM.
13. STRUCTURE IS DESIGNED FOR DL+LL COMBINATION BY CONSIDERING 1.50 AS TOTAL LOAD FACTOR.
14. BEFORE CASTING FOUNDATION, CLIENT / CONTRACTOR RESPONSIBILITY TO GET IT CHECKED ON SITE. FOUNDATION DETAILS BY STRUCTURAL CONSULTANT. IF NOT, WE ARE NOT RESPONSIBLE FOR ON SITE PROVIDED DETAILS.

ORIENTATION			
N			
PROPOSED RESIDENTIAL BUILDING			
PROJECT	KARNATAKA, BHARATH -		
CLIENT	Mr. _		
DRG. TITLE			
FOOTING MARKING LAYOUT.			
SCALE	DATE	DEALT	DRG. No.
NTS	01/12/2024		
ARCHITECTS :-			

STRUCTURAL NOTES:
01. ALL DIMENSIONS ARE IN INCHES & LEVELS ARE IN FEET.
02. DO NOT SCALE THE DRG. FOLLOW WRITTEN DIMENSIONS ONLY.
03. READ THIS DRG. ALONG WITH RELEVANT ARCH./LANDSCAPE / SERVICE DRGS
04. ALL LEVELS / PROFILES / DIMENSIONS / LOCATIONS ARE TO BE CHECKED WITH ARCHITECTURAL / SERVICE DRG.
05. GRADE OF CONCRETE - M25 (1 : 1 : 2)
06. GRADE OF STEEL - Fe-500 & DENOTED AS "T".
07. COVER TO REIN. IN FOOTING = 2".
PEDESTAL COLUMN = 1.5"
08. SBC OF SOIL IS CONSIDERED 200 kN/m² AT 6'6" DEPTH FROM NGL LVL.
09. ANY LOOSE POCKETS/WATER TABLE IN FOOTING PITS SHOULD BE BROUGHT TO THE NOTICE OF THE STRUCTURAL CONSULTANT PRIOR TO EXECUTION.
10. ADD 4" ON EITHER SIDE OF THE FOOTING FOR EXCAVATION.
11. ANY DISCREPANCY IN THE DRG. / SITE SHOULD BE BROUGHT TO THE NOTICE OF THE CONSULTANTS PRIOR TO EXECUTION.
12. STRUCTURE IS DESIGNED FOR:
GF + 3 FLOORS + TOTAL 4 SLABS + RM.
13. STRUCTURE IS DESIGNED FOR DL+LL COMBINATION BY CONSIDERING 1.50 AS TOTAL LOAD FACTOR.
14. BEFORE CASTING FOUNDATION, CLIENT / CONTRACTOR RESPONSIBILITY TO GET IT CHECKED ON SITE. FOUNDATION DETAILS BY STRUCTURAL CONSULTANT. IF NOT, WE ARE NOT RESPONSIBLE FOR ON SITE PROVIDED DETAILS.

STRUCTURAL CONSULTANTS

DRAWN	ADARSH	DESIGNED	ARON
DATE	01-12-2024	JOB NO.	1031

PROJECT			
PROPOSED RESIDENTIAL BUILDING			
KARNATAKA, BHARATH -			
CLIENT	Mr. _		
DRG. TITLE			
PEDESTAL SCHEDULE.			
SCALE	DATE	DEALT	DRG. No.
NTS	01/12/2024		
ARCHITECTS :-			